

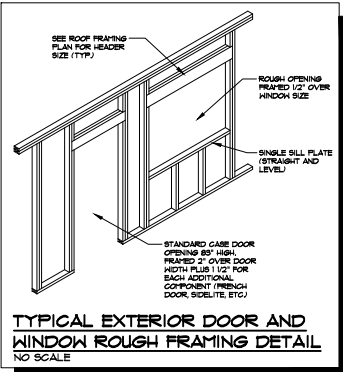


PALOMINO



**MASONRY NOTE:**

1. MASONRY VENEER SHALL HAVE CORROSION RESISTANT ANCHOR TIES OF NOT LESS THAN 22 GA. x 1/8\"/>

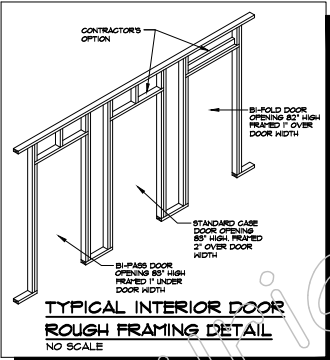

GUARDRAIL TO BE 36\"/>




FRONT ELEVATION  
SCALE: 1/4\"/>



- ### MAIN FLOOR GENERAL NOTES:
1. ALL DIMENSIONS ARE TO SQUARE FRAMING. INTERIOR STUDWALLS ARE SHOWN AS 4" UNLESS NOTED OTHERWISE. EXTERIOR WALLS ARE SHOWN AS 6" UNLESS NOTED OTHERWISE.
  2. DOOR FROM GARAGE TO HOUSE TO BE 20 MIN. LABELED, SEAL AND FIRE RATED DOOR WHICH DOES NOT OPEN INTO A SLEEPING ROOM.
  3. THE GARAGE SHALL BE SEPARATED FROM THE RESIDENCE AND ATTACHED GARAGE BY A 2" MIN. 1/2" (2") GYPSUM BOARD APPLIED TO THE GARAGE SIDE. GARAGES SHALL BE SEPARATED FROM THE RESIDENCE BY ALL HABITABLE ROOMS ABOVE BY NOT LESS THAN 5/8" MIN. GYPSUM BOARD. ALL GARAGE WALLS SHALL BE GELING (FIELD AND PERIMETER) WITH 1/8" 64 NAILS OR EQUIVALENT DRYTALL BORDERS AND T&G. ALL OTHER WALLS SHALL BE 5/8" MIN. GYPSUM BOARD.
  4. PROVIDE APPROVED ATTIC ACCESS TO ALL ATTIC AREAS FROM THE GARAGE. ACCESS SHALL BE HORIZONTAL HEIGHT OF 50" OR GREATER.
  5. SLIP PLATES AND ANY OTHER LIFTERS IN CONTACT WITH FLOOR SHALL BE 2" MIN. THICK AND HAVE A VERTICAL HEIGHT OF 50" OR GREATER.
  6. THE UNDERSIDE OF ANY BAY OR CANTILEVER FLOOR SHALL BE SEALED AIRTIGHT WITH OSB, PLYWOOD OR OTHER NATURAL MATERIAL.
  7. ALL WINDOWS OVER TUBS SHALL BE TYPHERED UNLESS SLIP HEIGHT IS A MINIMUM OF 5' ABOVE FLOOR OF TUB.

- [illegible]

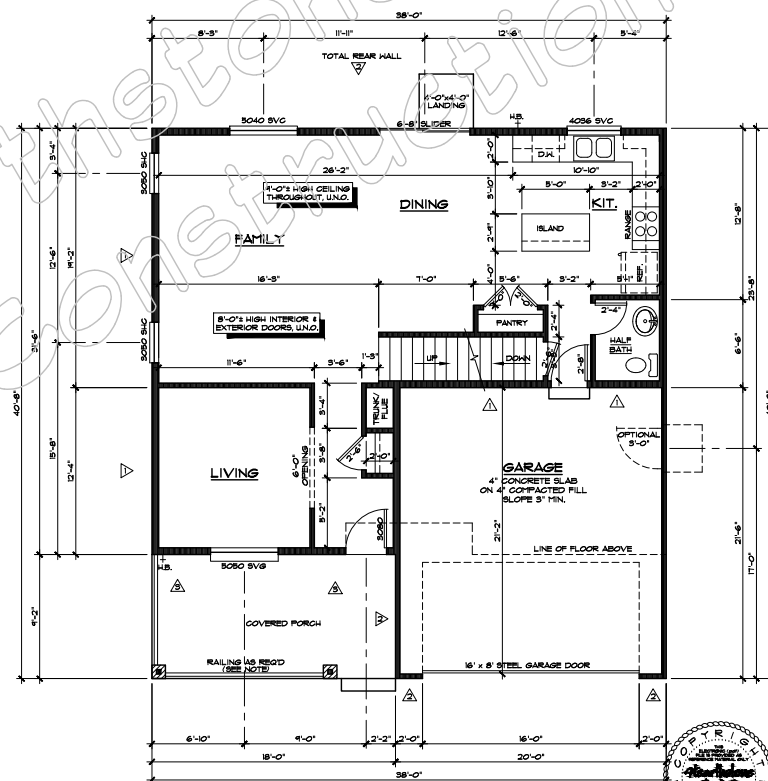

**MAIN FLOOR PLAN**  
SCALE: 1/4"=1'-0" 934 S.F.

