

AND SHALL HAVE INTERMEDIATE RAILS SUCH THAT A SPHERE 4" IN DIAMETER CANNOT PASS THROUGH. HANDRAILS ARE REQUIRED ON ALL STAIRWAYS WITH 2 OR MORE RISERS.

PROVIDE CAULKING AND MINIMUM 4" COUNTER FLASHING AT ALL EXTERIOR DOORS/WINDOWS PER MANUFACTURER INSTALLATION REQUIREMENTS.

GA. x 7/8" SPACED NOT MORE THAN 24" O.C. HORIZONTAL AND SUPPORT A MAXIMUM OF 2 SQUARE FEET OF WALL AREA. AROUND WALL OPENINGS GREATER THAN 16" ADDITIONAL TIES ARE REQUIRED TO BE SPACED A MAXIMUM OF 36" O.C. AND BE WITHIN 12" OF THE OPENING. PROVIDE 26 GAUGE FLASHING FROM FOUNDATION UP FIRST 3 COURSES. CULTURED STONE TO BE INSTALLED PER MANUFACTURERS SPECIFICATIONS.

2.FOR BRICK SUPPORT OVER OPENINGS, SEE VENEER LINTEL TABLE ON SHEET S1

3.WEEPHOLES SHALL BE PROVIDED IN THE OUTSIDE WYTHE OF MASONRY WALLS @ 24" O.C. AND BE NO LESS THAN 3/16" LOCATED IMMEDIATELY ABOVE FLASHING. FLASHING TO BE 26 GAUGE FROM FOUNDATION UP FIRST THREE COURSES.

30 YEAR ARCH. SHINGLES ON 15# FELT

6" FASCIA (TYP.)

TOP PLATE

STUCCO

UPPER FLOOR LINE

TOP PLATE

MAIN FLOOR LINE

TOP OF FOUNDATION


30" MIN. Frost COVER

Copyright © 2019 One Design

PRELIMINARY

PROVIDE CAULKING AND MINIMUM 9" COUNTER FLASHING AT ALL EXTERIOR DOORS/WINDOWS PER MANUFACTURER INSTALLATION REQUIREMENTS.


1. MASONRY VENEER SHALL HAVE CORROSION RESISTANT ANCHOR TIES OF NOT LESS THAN 22 GA. X 7/8" SPACED NOT MORE THAN 24" o.c. HORIZONTAL AND SUPPORT A MAXIMUM OF 2 SOLETS PER FEET OF VENEER. IF THE WALL OPENINGS GREATER THAN 16" ADDITIONAL TIES ARE REQUIRED TO BE SPACED A MAXIMUM OF 36" o.c. AND BE WITHIN 12" OF THE OPENING. PROVIDE 26 GAUGE FLASHING FROM FOUNDATION UP FIRST 3 COURSES. CULTURED STONE TO BE USED PER SPECIFICATIONS.
2. FOR BRICK SUPPORT OVER OPENINGS, SEE VENEER LINTEL TABLE ON SHEET S.
3. KNEEPOLES SHALL BE PROVIDED IN THE OUTSIDE BUTT OF MASONRY WALLS @ 24" o.c. AND BE NO LESS THAN 3/16" LOCATED IMMEDIATELY ABOVE FLASHING. FLASHING TO BE 26 GAUGE FROM FOUNDATION UP FIRST THREE COURSES.

— 6th FASCIA (TYP)


PRELIMINARY
 THESE PLANS ARE THE PROPERTY OF HENKHOUS DESIGN, INC. AND ARE NOT TO BE COPIED OR REPRODUCED WITHOUT WRITTEN PERMISSION OF HENKHOUS DESIGN, INC.

SCALE: 1/4"=1'-0"

SHEET
4

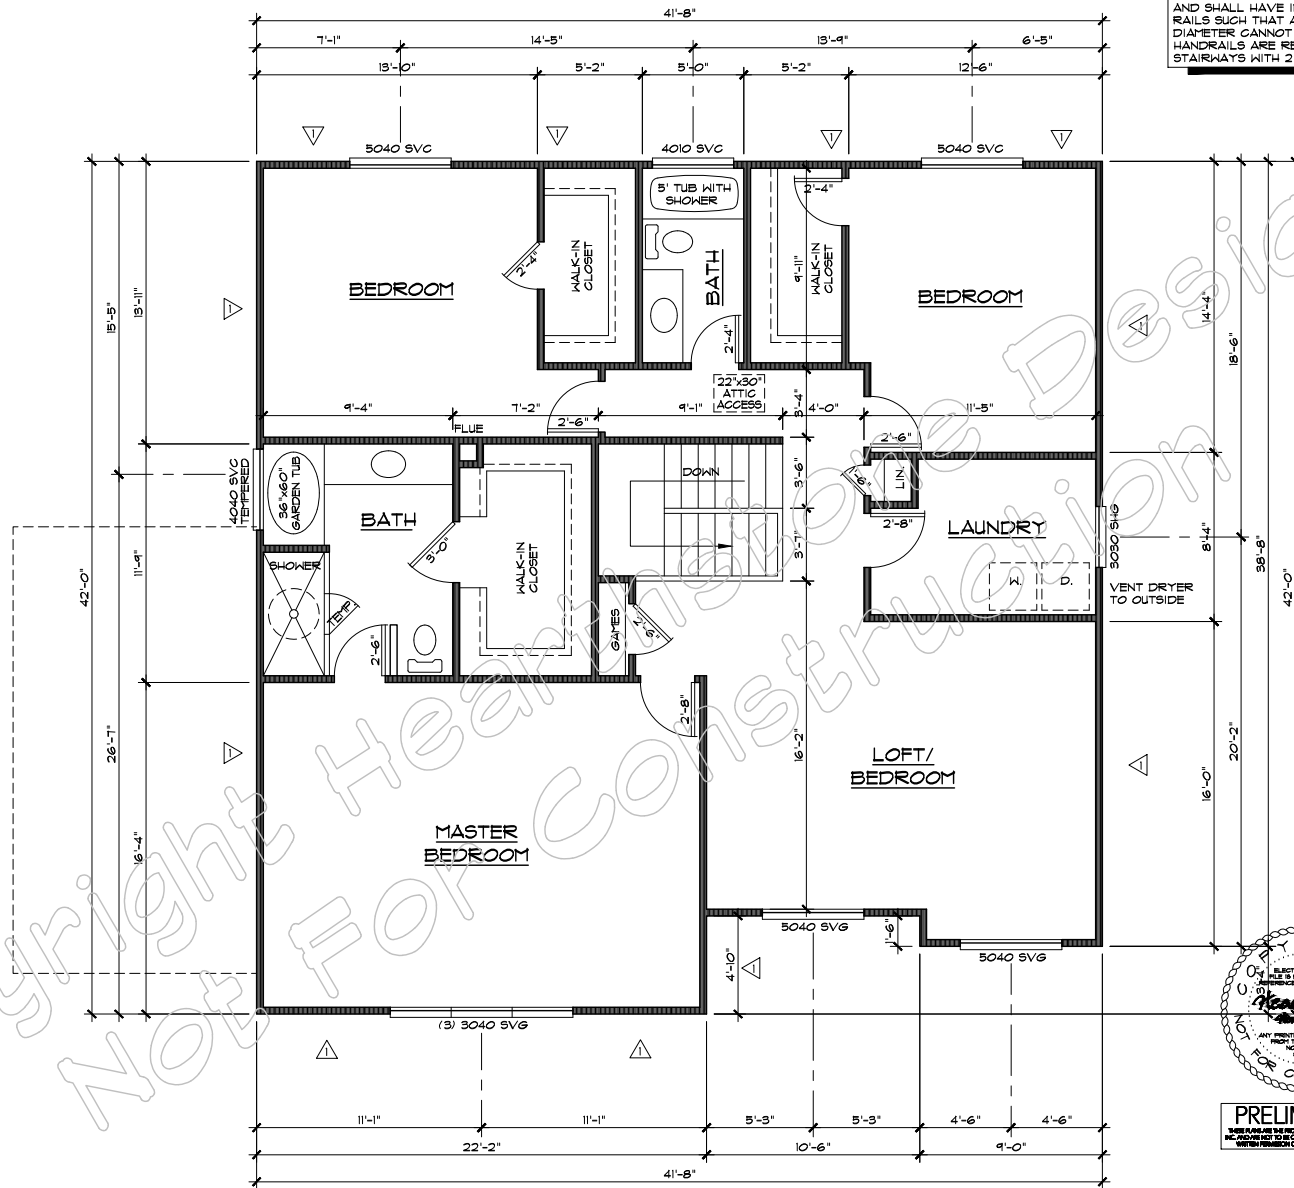

GUARDRAIL TO BE 36" HIGH (MIN.) AND SHALL HAVE INTERMEDIATE RAILS SUCH THAT A SPHERE 4" IN DIAMETER CANNOT PASS THROUGH. HANDRAILS ARE REQUIRED ON ALL STAIRWAYS WITH 2 OR MORE RISERS.



PRELIMINARY
THIS PLAN IS THE PROPERTY OF HEATTHEHOME DESIGN, INC. AND IS NOT TO BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF HEATTHEHOME DESIGN, INC.

UPPER FLOOR PLAN
SCALE: 1/4"=1'-0" 1608 S.F.